

## Low pressure diffuse light

High luminous efficiency, luminous efficiency 145lm/W

Professional large lens light distribution design, 175° large Angle light

Thickened aluminum substrate, super heat dissipation

1.5mm<sup>2</sup> Tinned copper wire, safe and reliable


**REPSN**<sup>®</sup>

## Product parameter

Item No.	RLB-BL-3030-12-8FC
LEDs/m	3030
color	white 8500K
CRI	85
Voltage	DC12V
Luminous flux	1160
Light efficiency	145
Wattage	8W
IP Rate	IP20
View angle	175°
Duration of warranty	3years
Number of lights	8PCS
Cut specification	One light, one cut
Standard cascade	8
Dimension	L500×18mm

Note: The above data are typical values, and the actual product parameters may be different from the typical data

## Dimension (Unit: mm)

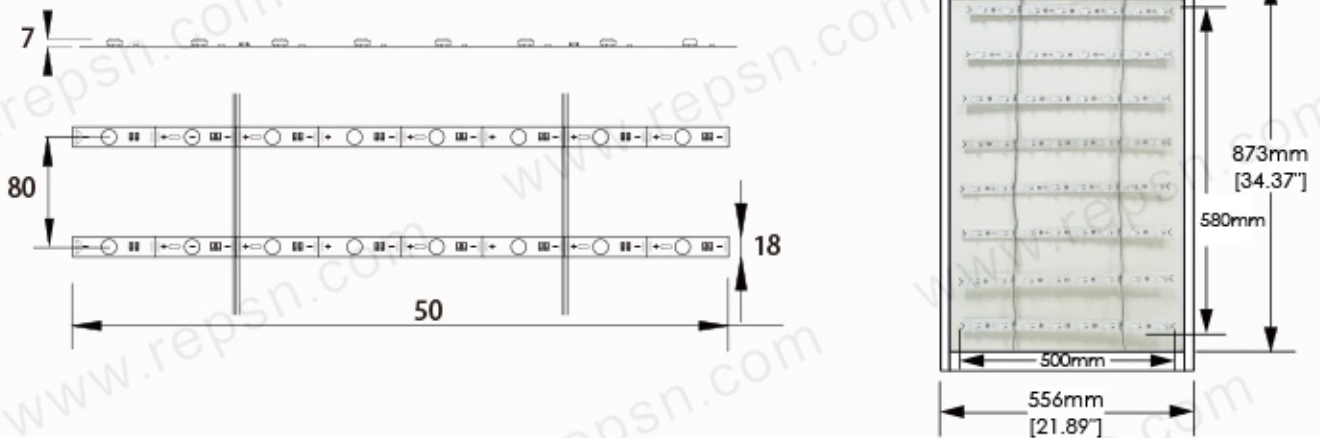

## Application scenarios

