




Suzhou . China

	Light Angle
DC 12V	RoHS
CE	IP 66
Recommended depth 40mm	3M TAPE

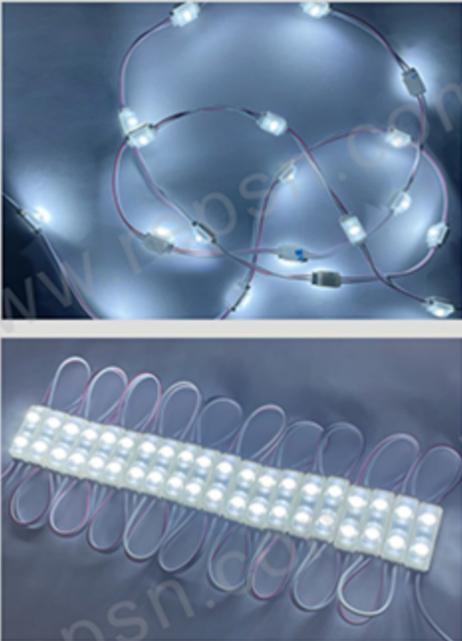

RPS-D1 / D2 LED INJECTION MODULE


PARAMETERS

Order	LEDs/pc	Dimension	Voltage	Wattage	Lumen(lm)	IP rate	Wire length	G.W/cnt(kg)	Package	Carton size(mm)
RPS-D1	1pc	16*8*7mm	DC12V	0.4W	60lm	Ip67	70MM	23.8	15000	510*360*310
RPS-D2	2pcs	26*8*7mm	DC12V	0.8W	120lm	Ip67	70MM	--	--	510*360*310


FEATURES

- ▶ Lensed LED modules of the D series contain high-brightness Epistar LEDs, are small in size and have a double dispersion angle of 120x140 degrees.
- ▶ These LED modules with a lens are used to illuminate narrow three-dimensional letters, complex fonts or certain places where another module does not fit.
- ▶ Can be combined with other series to achieve glowing results.

BEAMING ANGLE

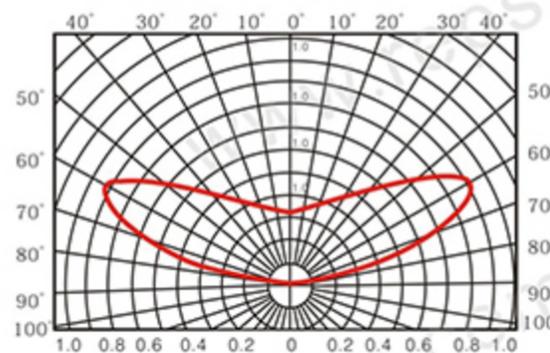

WIRE CONNECTION

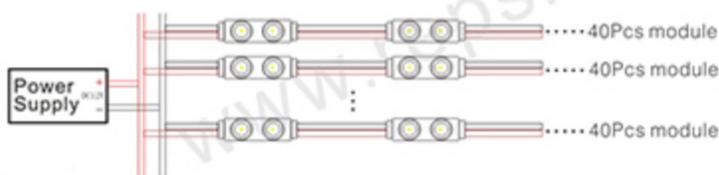

Note:
every 40 Pcs sets for the primary circuit,
more than 40 Pcs sets should be connected to the main line.

PACKING



SUZHOU REPSN PHOTOELECTRIC TECHNOLOGY CO.,LTD.

Add: NO.999 Xingdong Rd Wangshan industrial park Wuzhong district Suzhou city.China
Tel: +86-0512-66536260 Http: //www.repsn.com Mail: led@repsn.com