

REPSN[®]

Suzhou . China



RPS-M1 / M2 / M3 / M4 LED INJECTION MODULE


PARAMETERS

Order	LEDs/pc	Dimension	Voltage	Wattage	Lumen(lm)	IP rate	Wire length	G.W/cnt(kg)	Package	Carton size(mm)
RPS-M1	1pc	36*17*7mm	DC12V	0.5W	65lm	Ip66	80MM	23.9	5400	510*360*310
RPS-M2	2pcs	50*17*7mm	DC12V	1.0W	130lm	Ip66	154MM	26.8	--	510*360*310
RPS-M3	3pcs	70*17*7mm	DC12V	1.5W	195lm	Ip66	155MM	24	2600	510*360*310
RPS-M4	4pcs	36*36*7mm	DC12V	2.0W	260lm	Ip66	80MM	24	2500	510*360*310


FEATURES

- ▶ The luxury series of led modules containing high brightness epistar leds is a top seller.
- ▶ Led lensed modules are used to illuminate three-dimensional letters and light boxes with a depth of 40 mm, while ensuring uniform illumination without spots due to the small height of the module body and the latest generation 175° lens developed at our plant by Chinese engineers

BEAMING ANGLE

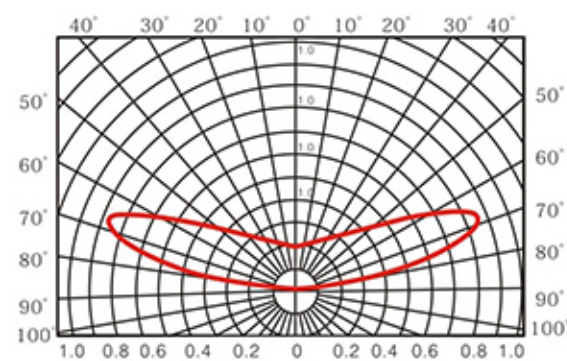

WIRE CONNECTION

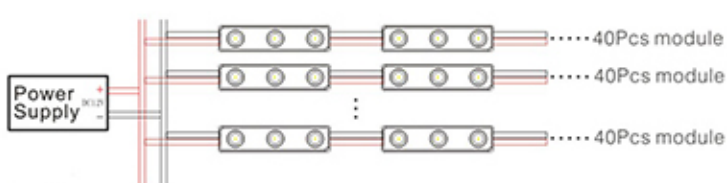

Note:
every 40 Pcs sets for the primary circuit,
more than 40 Pcs sets should be connected to the main line.

PACKING



SUZHOU REPSN PHOTOELECTRIC TECHNOLOGY CO.,LTD.

Add: NO.999 Xingdong Rd Wangshan industrial park Wuzhong district, Suzhou city, China
Tel: +86-0512-66536260 Http: //www.repsn.com Mail: led@repsn.com