



RPS-V SERIES LED INJECTION MODULE


PARAMETERS

Order	LEDs/pc	Dimension	Voltage	Wattage	Lumen(lm)	IP rate	Carton size(mm)
RPS-V3-12	3pcs 3030	70*16*7mm	DC12V	1.35W	210lm	Ip67	500*360*310
RPS-V2-12	2pcs 3030	50*16*7mm	DC12V	0.88W	137lm	Ip67	500*360*310
RPS-V1-12	1pc 3030	34*17*7mm	DC12V	0.5W	78lm	Ip67	500*360*310


FEATURES

- ▶ The back of the case is made of a metal substrate, which improves heat dissipation, thereby increasing the service life of the module.
- ▶ Modules are used in volumetric letters or light boxes with a depth of 30 mm or more

BEAMING ANGLE

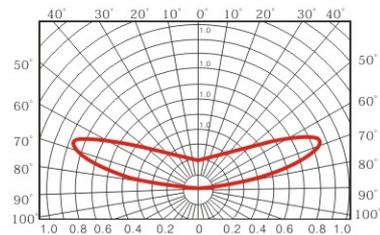

WIRE CONNECTION

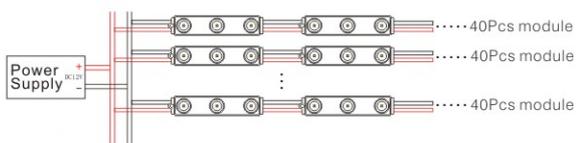

Note:
every 40 Pcs sets for the primary circuit,
more than 40 Pcs sets should be connected to the main line.

PACKING



WECHAT QR CODE



WEBSITE QR CODE

SUZHOU REPSN PHOTOELECTRIC TECHNOLOGY CO.,LTD.

Add: NO.999 Xingdong Rd Wangshan industrial park Wuzhong district Suzhou city China
Tel: +86-0512-66536260 Http: //www.repsn.com Mail: led@repsn.com