

RPS-HY LED INJECTION MODULE


PARAMETERS

Order	LEDs/pc	Dimension	Voltage	Wattage	Lumen(lm)	IP rate	Carton size(mm)
RPS-HY3-12	3pcs 2835	68*15*8mm	DC12V	1.5W	192lm	Ip65	500*360*310
RPS-HY2-12	2pcs 2835	47*15*8mm	DC12V	1.0W	128lm	Ip65	500*360*310
RPS-HY1-12	1pc 2835	29*15*8mm	DC12V	0.5W	64lm	Ip65	500*360*310


FEATURES

- ▶ The back of the case is made of a metal substrate, which improves heat dissipation, thereby increasing the service life of the module.
- ▶ 3M glue back, safe and convenient;
- ▶ Customization is available upon request

BEAMING ANGLE

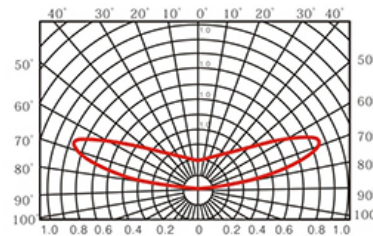

WIRE CONNECTION

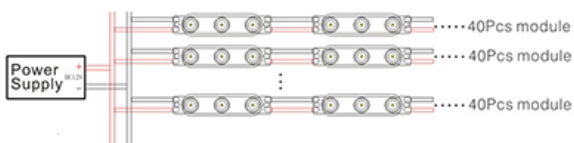

Note:
every 40 Pcs sets for the primary circuit,
more than 40 Pcs sets should be connected to the main line.

PACKING



WECHAT QR CODE



WEBSITE QR CODE

SUZHOU REPSN PHOTOELECTRIC TECHNOLOGY CO.,LTD.

Add: NO.999 Xingdong Rd Wangshan industrial park Wuzhong district Suzhou city,China
Tel: +86-0512-66536260 Http: //www.repsn.com Mail: led@repsn.com